

FCX US

housing: RAL 9002
 head and feet: RAL 7044

Fan coils

Vertical and horizontal

Floor, wall and ceiling installation

Cooling capacity from 2.218 to 26.001 BTU/h

Heating capacity from 3.378 to 58.075 BTU/h



FCX_US

- UNIVERSAL FLOOR OR WALL CEILING MOUNTING
- EXTREMELY SILENT OPERATION
- GRILLE WITH FIXED FINS

FEATURES

The units of the FCX series are fan coils which are suitable for air conditioning. They come with multi-speed motors and are available in various set-ups depending on the installation position, with the possibility of being ducted as well. They have ABS fans with an impeller equipped with inspectionable airfoil and scroll fins. This feature gives the machine a net reduction in the noise emission level, as well as a reduction in the motor's electrical consumption compared to traditional fans with a metal structure. The unit can be equipped with a single/double heat exchange coil (2/4 pipe system), with 3/4 rows depending on the model. The units can also be equipped with multiple accessories and can be integrated into the

centralised VMF - Aermec hydronic management system.

- Versions standar coil "3-row coil" (FCX 17, 22, 32, 42, 50, 62, 82 and 102).
- Versions increased coil "4-row coil" (FCX 24, 34, 44, 54, 64 and 84).
- 3-speed ventilating unit.
- Full compliance with the accident prevention standards.
- Rounded line.
- Automatic fan coil switch-off with closure of the air distribution grille.
- Broad range of controls.
- Metallic protective cabinet with rustproofing

polyester paint.

- Quiet operation.
- Low loss of charge in the heat exchange batteries.
- Electric motors with permanently inserted condensers.
- Ease of installation and maintenance.
- Air filter easy to remove and clean.
- Extractable shrouds for easy, effective cleaning.
- Water connections can be reversed during installation phase.

UNIT CONFIGURATOR

NAME

FCX

TYPE OF INSTALLATION

US Universal and floor installation

SIZE 17 - 22 - 24 - 32 - 34 - 36 - 42 - 44 - 50 - 54 - 56 - 62 - 64 - 82 - 84 - 102

POWER SUPPLY

120 120V/60Hz

277 277V/60Hz

E Indicates the presence of an evaporative cooler instead of water heat exchanger

R Indicates the presence of an additionally electric heating element for power supply 277V or an independently supplied 240/208V heating element for power supply 120V.

TECHNICAL DATA - 2 PIPE SYSTEMS

| FCX_US - 2 PIPE SYSTEMS | | 17 | | | 22 | | | 24 | | | 32 | | | 34 | | | 36 | | | 42 | | | 44 | | |
|----------------------------------|-----------|-------|-------|-------|--------|-------|-------|--------|--------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Fan speed | | H | M | L | H | M | L | H | M | L | H | M | L | H | M | L | H | M | L | H | M | L | H | M | L |
| Hating Performance | | | | | | | | | | | | | | | | | | | | | | | | | |
| Heating capacity (70°C/158°F) | (1) BTU/h | 7.848 | 6.927 | 5.767 | 10.100 | 8.633 | 6.517 | 13.341 | 10.578 | 7.165 | 18.255 | 13.887 | 10.816 | 20.336 | 16.378 | 12.727 | 21.872 | 16.992 | 14.297 | 22.588 | 18.835 | 13.853 | 29.344 | 23.646 | 17.743 |
| Water flow rate | (1) gpm | 0,88 | 0,78 | 0,65 | 1.14 | 0.98 | 0.74 | 1.51 | 1.20 | 0.81 | 2.07 | 1.57 | 1.22 | 2.30 | 1.85 | 1.44 | 2,48 | 1,92 | 1,62 | 2,56 | 2,13 | 1,57 | 3,32 | 2,68 | 2,01 |
| Pressure drops | (1) psi | 0,44 | 0,29 | 0,15 | 0,87 | 0,58 | 0,44 | 0,58 | 0,44 | 0,15 | 2,90 | 1,74 | 1,16 | 1,60 | 1,02 | 0,73 | 3,34 | 2,18 | 1,60 | 2,18 | 1,60 | 0,87 | 3,19 | 2,18 | 1,31 |
| Heating capacity (45°C/113°F) | (2) BTU/h | 3.890 | 3.446 | 2.866 | 5.016 | 4.299 | 3.242 | 6.654 | 5.255 | 3.549 | 9.076 | 6.893 | 5.357 | 10.134 | 8.155 | 6.312 | 10.885 | 8.462 | 7.097 | 11.226 | 9.383 | 6.893 | 14.604 | 11.772 | 8.837 |
| Water flow rate | (2) gpm | 0,87 | 0,77 | 0,64 | 1.13 | 0,96 | 0,73 | 1.49 | 1.18 | 0,80 | 2.03 | 1.55 | 1.20 | 2,27 | 1,82 | 1,42 | 2,44 | 1,89 | 1,59 | 2,51 | 2,10 | 1,55 | 3,27 | 2,63 | 1,98 |
| Pressure drops | (2) psi | 0,29 | 0,29 | 0,15 | 0,73 | 0,58 | 0,29 | 0,58 | 0,44 | 0,15 | 2,76 | 1,74 | 1,16 | 1,45 | 1,02 | 0,58 | 3,34 | 2,03 | 1,60 | 2,03 | 1,45 | 0,87 | 3,05 | 2,03 | 1,31 |
| Cooling Performance | | | | | | | | | | | | | | | | | | | | | | | | | |
| Total cooling capacity | (3) BTU/h | 3.412 | 2.866 | 2.218 | 5.118 | 4.163 | 2.866 | 5.903 | 4.675 | 3.446 | 8.189 | 6.278 | 5.289 | 9.554 | 7.780 | 6.005 | 9.554 | 7.336 | 6.176 | 11.601 | 9.486 | 7.882 | 15.184 | 12.250 | 9.179 |
| Sensible cooling capacity | (3) BTU/h | 2.832 | 2.354 | 1.740 | 4.231 | 3.412 | 2.286 | 4.709 | 3.719 | 2.593 | 6.483 | 5.357 | 3.787 | 7.268 | 5.869 | 4.265 | 7.507 | 6.210 | 4.368 | 9.418 | 7.200 | 5.562 | 11.260 | 9.008 | 6.688 |
| Water flow rate | (3) gpm | 0,76 | 0,63 | 0,49 | 1.14 | 0,92 | 0,63 | 1.31 | 1.04 | 0,77 | 1,82 | 1,39 | 1,18 | 2,12 | 1,73 | 1,33 | 2,12 | 1,63 | 1,37 | 2,58 | 2,10 | 1,75 | 3,37 | 2,72 | 2,04 |
| Pressure drops | (3) psi | 0,44 | 0,29 | 0,15 | 0,87 | 0,73 | 0,44 | 0,44 | 0,29 | 0,15 | 4,06 | 2,47 | 1,89 | 2,03 | 1,45 | 0,87 | 4,06 | 2,47 | 1,89 | 2,03 | 1,45 | 1,02 | 5,80 | 3,92 | 2,32 |
| Fans | | | | | | | | | | | | | | | | | | | | | | | | | |
| Centrifugal fans | n° | 1 | | | 1 | | | 1 | | | 2 | | | 2 | | | 2 | | | 2 | | | 2 | | |
| Air flow rate | cfm | 118 | 94 | 65 | 171 | 129 | 82 | 171 | 129 | 82 | 265 | 206 | 153 | 265 | 206 | 153 | 265 | 206 | 153 | 353 | 271 | 194 | 353 | 271 | 194 |
| Sound level | | | | | | | | | | | | | | | | | | | | | | | | | |
| Sound power | dB(A) | 45 | 38 | 31 | 50 | 43 | 31 | 50 | 43 | 31 | 48 | 41 | 34 | 48 | 41 | 34 | 48 | 41 | 34 | 51 | 44 | 39 | 51 | 44 | 39 |
| Sound pressure | (4) dB(A) | 37 | 30 | 23 | 42 | 35 | 23 | 42 | 35 | 23 | 40 | 33 | 26 | 40 | 33 | 26 | 40 | 33 | 26 | 43 | 36 | 31 | 43 | 36 | 31 |
| Hydraulic connections | | | | | | | | | | | | | | | | | | | | | | | | | |
| Standard coil | Ø | 1/2" | | | 1/2" | | | - | | | 1/2" | | | - | | | 3/4" | | | 3/4" | | | - | | |
| Increased coil | Ø | - | | | - | | | 3/4" | | | - | | | 3/4" | | | - | | | - | | | 3/4" | | |
| Electrical data 120V~60Hz | | | | | | | | | | | | | | | | | | | | | | | | | |
| FLA | A | - | | | - | | | - | | | - | | | - | | | - | | | - | | | - | | |
| Electrical data 220V~60Hz | | | | | | | | | | | | | | | | | | | | | | | | | |
| FLA | A | 0.13 | | | 0.20 | | | 0.20 | | | 0.26 | | | 0.26 | | | 0.26 | | | 0.35 | | | 0.35 | | |

| FCX_US - 2 PIPE SYSTEMS | | 50 | | | 54 | | | 56 | | | 62 | | | 64 | | | 82 | | | 84 | | | 102 | | |
|----------------------------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Fan speed | | H | M | L | H | M | L | H | M | L | H | M | L | H | M | L | H | M | L | H | M | L | H | M | L |
| Hating Performance | | | | | | | | | | | | | | | | | | | | | | | | | |
| Heating capacity (70°C/158°F) | (1) BTU/h | 27.945 | 25.693 | 17.129 | 34.463 | 29.890 | 21.292 | 32.927 | 28.764 | 20.678 | 44.085 | 37.329 | 28.423 | 48.794 | 39.240 | 29.003 | 51.660 | 45.552 | 36.749 | 58.348 | 49.203 | 38.216 | 58.075 | 52.001 | 42.856 |
| Water flow rate | (1) gpm | 3,17 | 2,91 | 1,94 | 3,90 | 3,38 | 2,41 | 3,72 | 3,26 | 2,34 | 4,99 | 4,23 | 3,21 | 5,52 | 4,44 | 3,28 | 5,85 | 5,16 | 4,16 | 6,60 | 5,57 | 4,32 | 6,57 | 5,89 | 4,85 |
| Pressure drops | (1) psi | 2,18 | 1,89 | 0,87 | 3,34 | 2,61 | 1,45 | 6,09 | 4,93 | 2,61 | 2,18 | 1,60 | 1,02 | 3,34 | 2,18 | 1,31 | 3,05 | 2,32 | 1,60 | 4,50 | 3,34 | 2,18 | 6,24 | 5,08 | 3,63 |
| Heating capacity (45°C/113°F) | (2) BTU/h | 13.922 | 12.796 | 8.530 | 17.129 | 14.877 | 10.578 | 16.378 | 14.331 | 10.271 | 21.940 | 18.562 | 14.126 | 24.260 | 19.517 | 14.433 | 25.693 | 22.657 | 18.289 | 29.037 | 24.465 | 19.006 | 28.901 | 25.864 | 21.326 |
| Water flow rate | (2) gpm | 3,11 | 2,86 | 1,91 | 3,84 | 3,33 | 2,37 | 3,67 | 3,21 | 2,30 | 4,91 | 4,16 | 3,17 | 5,43 | 4,37 | 3,23 | 5,75 | 5,07 | 4,09 | 6,50 | 5,48 | 4,26 | 6,47 | 5,79 | 4,77 |
| Pressure drops | (2) psi | 2,03 | 1,74 | 0,87 | 3,19 | 2,47 | 1,31 | 5,80 | 4,79 | 2,47 | 2,18 | 1,60 | 1,02 | 3,19 | 2,18 | 1,31 | 2,90 | 2,32 | 1,60 | 4,35 | 3,19 | 2,03 | 5,95 | 4,93 | 3,48 |
| Cooling Performance | | | | | | | | | | | | | | | | | | | | | | | | | |
| Total cooling capacity | (3) BTU/h | 14.297 | 11.977 | 11.977 | 16.958 | 14.740 | 10.578 | 15.696 | 13.137 | 9.418 | 16.583 | 14.911 | 10.987 | 21.667 | 17.777 | 13.376 | 23.578 | 17.061 | 14.638 | 29.344 | 24.977 | 19.688 | 26.001 | 23.476 | 19.415 |
| Sensible cooling capacity | (3) BTU/h | 10.236 | 8.667 | 6.108 | 12.079 | 10.441 | 7.404 | 11.942 | 10.475 | 7.234 | 13.580 | 11.260 | 8.326 | 17.163 | 13.990 | 10.441 | 19.381 | 12.898 | 10.134 | 19.722 | 16.617 | 9.554 | 18.869 | 18.255 | 15.082 |
| Water flow rate | (3) gpm | 3,17 | 2,66 | 1,90 | 3,76 | 3,27 | 2,35 | 3,48 | 2,91 | 2,09 | 3,68 | 3,31 | 2,44 | 4,81 | 3,94 | 2,97 | 5,24 | 3,79 | 3,25 | 6,51 | 5,54 | 4,37 | 5,77 | 5,21 | 4,31 |
| Pressure drops | (3) psi | 2,76 | 2,03 | 1,16 | 3,77 | 3,05 | 1,74 | 5,51 | 4,06 | 2,18 | 2,47 | 2,03 | 1,16 | 1,89 | 1,31 | 0,87 | 3,19 | 1,74 | 1,31 | 4,35 | 3,19 | 2,18 | 5,37 | 4,50 | 3,19 |
| Fans | | | | | | | | | | | | | | | | | | | | | | | | | |
| Centrifugal fans | n° | 2 | | | 2 | | | 2 | | | 3 | | | 3 | | | 3 | | | 3 | | | 3 | | |
| Air flow rate | cfm | 424 | 353 | 235 | 424 | 353 | 235 | 424 | 353 | 235 | 541 | 424 | 306 | 541 | 424 | 306 | 671 | 547 | 412 | 671 | 547 | 412 | 671 | 547 | 412 |
| Sound level | | | | | | | | | | | | | | | | | | | | | | | | | |
| Sound power | dB(A) | 56 | 51 | 42 | 56 | 51 | 42 | 56 | 51 | 42 | 57 | 51 | 42 | 57 | 51 | 42 | 62 | 57 | 51 | 62 | 57 | 51 | 66 | 61 | 56 |
| Sound pressure | (4) dB(A) | 48 | 43 | 34 | 48 | 43 | 34 | 48 | 43 | 34 | 49 | 43 | 34 | 49 | 43 | 34 | 54 | 49 | 43 | 54 | 49 | 43 | 58 | 53 | 48 |
| Hydraulic connections | | | | | | | | | | | | | | | | | | | | | | | | | |
| Standard coil | Ø | 3/4" | | | - | | | 3/4" | | | 3/4" | | | - | | | 3/4" | | | - | | | 3/4" | | |
| Increased coil | Ø | - | | | 3/4" | | | - | | | - | | | 3/4" | | | - | | | 3/4" | | | - | | |
| Electrical data 120V~60Hz | | | | | | | | | | | | | | | | | | | | | | | | | |
| FLA | A | - | | | - | | | - | | | - | | | - | | | - | | | - | | | - | | |
| Electrical data 220V~60Hz | | | | | | | | | | | | | | | | | | | | | | | | | |
| FLA | A | 0.45 | | | 0.45 | | | 0.45 | | | 0.45 | | | 0.45 | | | 0.55 | | | 0.55 | | | 0.85 | | |

Performance of versions with upgraded motor refers to the following conditions:

- (1) Room air 68°F b.s.; Water (in/out) 158°F/140°F.
- (2) Room air 68°F b.s.; Water (in/out) 113°F/104°F.
- (3) Room air 80.6°F b.s./66.2°F b.u.; Water (in/out) 44.6°F/53.6°F.
- (4) Sound pressure level (weighted A) measured with open port in a 3 and reverberation time of 0.5 seconds room with 3002 ft.

TECHNICAL DATA - 4 PIPE SYSTEMS

| FCX_US - 4 PIPE SYSTEMS | | 17 | | | 22 | | | 32 | | | 36 | | | 42 | | | |
|----------------------------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|-------|
| Fan speed | | H | M | L | H | M | L | H | M | L | H | M | L | H | M | L | |
| Heating Performance | | | | | | | | | | | | | | | | | |
| Heating capacity (70°C/158°F) | (1) | BTU/h | 4.777 | 4.095 | 3.378 | 6.039 | 5.152 | 3.856 | 9.725 | 8.360 | 6.927 | 9.725 | 8.360 | 6.927 | 11.806 | 11.635 | 9.076 |
| Water flow rate | (1) | gpm | 0,54 | 0,46 | 0,38 | 0,68 | 0,58 | 0,44 | 1,10 | 0,95 | 0,78 | 1,10 | 0,95 | 0,78 | 1,33 | 1,32 | 1,03 |
| Pressure drops | (1) | psi | 0,44 | 0,29 | 0,29 | 0,87 | 0,73 | 0,44 | 2,32 | 1,74 | 1,16 | 2,32 | 1,74 | 1,16 | 3,05 | 2,90 | 2,03 |
| Cooling Performance | | | | | | | | | | | | | | | | | |
| Total cooling capacity | (3) | BTU/h | 3.412 | 2.866 | 2.218 | 5.118 | 4.163 | 2.866 | 8.189 | 6.278 | 5.289 | 9.554 | 7.336 | 6.176 | 11.601 | 9.486 | 7.882 |
| Sensible cooling capacity | (3) | BTU/h | 2.832 | 2.354 | 1.740 | 4.231 | 3.412 | 2.286 | 6.483 | 5.357 | 3.787 | 7.507 | 6.210 | 4.368 | 9.418 | 7.200 | 5.562 |
| Water flow rate | (3) | gpm | 0,76 | 0,63 | 0,49 | 1,14 | 0,92 | 0,63 | 1,82 | 1,39 | 1,18 | 2,12 | 1,63 | 1,37 | 2,58 | 2,10 | 1,75 |
| Pressure drops | (3) | psi | 0,44 | 0,29 | 0,15 | 0,87 | 0,73 | 0,44 | 4,06 | 2,47 | 1,89 | 4,06 | 2,47 | 1,89 | 2,03 | 1,45 | 1,02 |
| Fans | | | | | | | | | | | | | | | | | |
| Centrifugal fans | | n° | 1 | | | 1 | | | 2 | | | 2 | | | 2 | | |
| Air flow rate | | cfm | 200 | 160 | 110 | 171 | 129 | 82 | 265 | 206 | 153 | 450 | 350 | 260 | 353 | 271 | 194 |
| Sound level | | | | | | | | | | | | | | | | | |
| Sound power | | dB(A) | 45 | 38 | 31 | 50 | 43 | 31 | 48 | 41 | 34 | 48 | 41 | 34 | 51 | 44 | 39 |
| Sound pressure | (4) | dB(A) | 37 | 30 | 23 | 42 | 35 | 23 | 40 | 33 | 26 | 40 | 33 | 26 | 43 | 36 | 31 |
| Hydraulic connections | | | | | | | | | | | | | | | | | |
| Standard coil | | Ø | 1/2" | | | 1/2" | | | 1/2" | | | 3/4" | | | 3/4" | | |
| Additional heat exchanger | | Ø | 1/2" | | | 1/2" | | | 1/2" | | | 1/2" | | | 1/2" | | |
| Electrical data 120V~60Hz | | | | | | | | | | | | | | | | | |
| FLA | | A | - | | | - | | | - | | | - | | | - | | |
| Electrical data 220V~60Hz | | | | | | | | | | | | | | | | | |
| FLA | | A | 0.13 | | | 0.20 | | | 0.26 | | | 0.26 | | | 0.35 | | |


| FCX_US - 4 PIPE SYSTEMS | | 50 | | | 56 | | | 62 | | | 82 | | | 102 | | | |
|----------------------------------|-----|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Fan speed | | H | M | L | H | M | L | H | M | L | H | M | L | H | M | L | |
| Heating Performance | | | | | | | | | | | | | | | | | |
| Heating capacity (70°C/158°F) | (1) | BTU/h | 14.945 | 13.444 | 10.987 | 14.945 | 13.444 | 10.987 | 18.733 | 16.037 | 13.205 | 21.872 | 21.496 | 18.084 | 23.237 | 21.258 | 18.528 |
| Water flow rate | (1) | gpm | 1.69 | 1.52 | 1.24 | 1,69 | 1,52 | 1,24 | 2,12 | 1,81 | 1,49 | 2,47 | 2,43 | 2,05 | 2,63 | 2,41 | 2,10 |
| Pressure drops | (1) | psi | 5.08 | 4.35 | 3.05 | 5,08 | 4,35 | 3,05 | 2,32 | 1,74 | 1,45 | 2,18 | 2,03 | 1,60 | 2,76 | 2,32 | 1,89 |
| Cooling Performance | | | | | | | | | | | | | | | | | |
| Total cooling capacity | (3) | BTU/h | 14.297 | 11.977 | 11.977 | 15.696 | 13.137 | 9.418 | 16.583 | 14.911 | 10.987 | 23.578 | 17.061 | 14.638 | 26.001 | 23.476 | 19.415 |
| Sensible cooling capacity | (3) | BTU/h | 10.236 | 8.667 | 6.108 | 11.942 | 10.475 | 7.234 | 13.580 | 11.260 | 8.326 | 19.381 | 12.898 | 10.134 | 18.869 | 18.255 | 15.082 |
| Water flow rate | (3) | gpm | 3.17 | 2.66 | 1.90 | 3,48 | 2,91 | 2,09 | 3,68 | 3,31 | 2,44 | 5,24 | 3,79 | 3,25 | 5,77 | 5,21 | 4,31 |
| Pressure drops | (3) | psi | 2.76 | 2.03 | 1.16 | 5,51 | 4,06 | 2,18 | 2,47 | 2,03 | 1,16 | 3,19 | 1,74 | 1,31 | 5,37 | 4,50 | 3,19 |
| Fans | | | | | | | | | | | | | | | | | |
| Centrifugal fans | | n° | 2 | | | 2 | | | 3 | | | 3 | | | 3 | | |
| Air flow rate | | cfm | 424 | 353 | 235 | 720 | 600 | 400 | 541 | 424 | 306 | 671 | 547 | 412 | 1.140 | 930 | 700 |
| Sound level | | | | | | | | | | | | | | | | | |
| Sound power | | dB(A) | 56 | 51 | 42 | 56 | 51 | 42 | 57 | 51 | 42 | 62 | 57 | 51 | 66 | 61 | 56 |
| Sound pressure | (4) | dB(A) | 48 | 43 | 34 | 48 | 43 | 34 | 49 | 43 | 34 | 54 | 49 | 43 | 58 | 53 | 48 |
| Hydraulic connections | | | | | | | | | | | | | | | | | |
| Standard coil | | Ø | 3/4" | | | 3/4" | | | 3/4" | | | 3/4" | | | 3/4" | | |
| Additional heat exchanger | | Ø | 1/2" | | | 1/2" | | | 1/2" | | | 1/2" | | | 1/2" | | |
| Electrical data 120V~60Hz | | | | | | | | | | | | | | | | | |
| FLA | | A | - | | | - | | | - | | | - | | | - | | |
| Electrical data 220V~60Hz | | | | | | | | | | | | | | | | | |
| FLA | | A | 0.45 | | | 0.45 | | | 0.45 | | | 0.55 | | | 0.85 | | |

Performance of versions with upgraded motor refers to the following conditions:


- (1) Room air 68°F b.s.; Water (in/out) 158°F/140°F.
- (3) Room air 80.6°F b.s./66.2°F b.u.; Water (in/out) 44.6°F/53.6°F.
- (4) Sound pressure level (weighted A) measured with open port in a 3 and reverberation time of 0.5 seconds room with 3002 ft.

CONFIGURATION AVAILABLE


FLOOR INSTALLATION

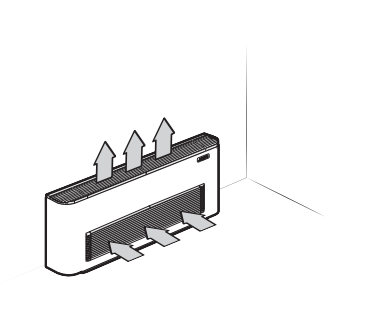



WALL INSTALLATION

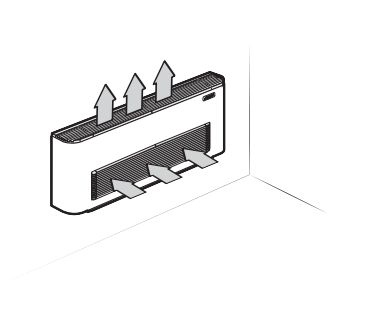

CEILING INSTALLATION



DIMENSIONS AND WEIGHT

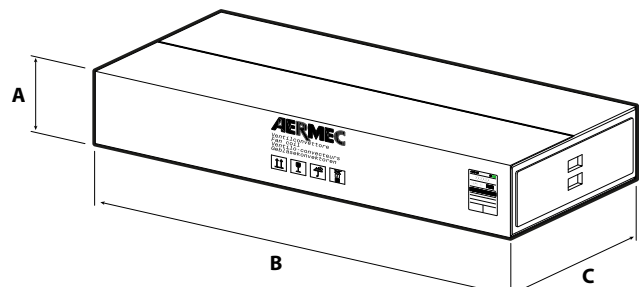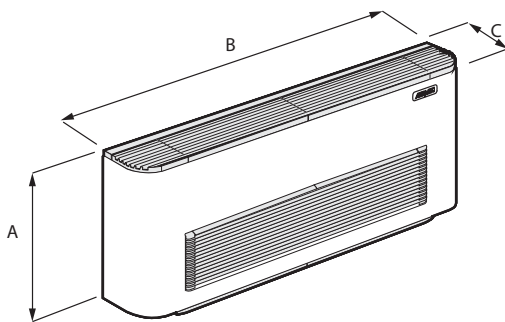

| FCX US DIMENSIONS AND WEIGHT | | | 22 | 24 | 32 | 34 | 42 | 44 | 50 | 54 | 62 | 64 | 82 | 84 |
|------------------------------|---|-----|------|------|------|------|------|------|------|------|------|------|------|------|
| Height | A | in | 19.2 | 19.2 | 19.2 | 19.2 | 19.2 | 19.2 | 19.2 | 19.2 | 23.2 | 23.2 | 23.2 | 23.2 |
| Long | B | in | 29.5 | 29.5 | 38.6 | 38.6 | 47.2 | 47.2 | 47.2 | 47.2 | 52.0 | 52.0 | 52.0 | 52.0 |
| Deep | C | in | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 | 8.7 |
| Weight | - | lbs | 33.1 | 32.0 | 44.1 | 44.1 | 52.9 | 52.9 | 52.9 | 52.9 | 75.0 | 80.5 | 75.0 | 80.5 |

| FCX US PACKAGING DIMENSIONS | | | 22 | 24 | 32 | 34 | 42 | 44 | 50 | 54 | 62 | 64 | 82 | 84 |
|-----------------------------|---|----|------|------|------|------|------|------|------|------|------|------|------|------|
| Height | A | in | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.8 | 10.6 | 10.6 | 10.6 | 10.6 |
| Long | B | in | 32.3 | 32.3 | 41.4 | 41.4 | 50.0 | 50.0 | 50.0 | 50.0 | 55.8 | 55.8 | 55.8 | 55.8 |
| Deep | C | in | 23.2 | 23.2 | 23.2 | 23.2 | 23.2 | 23.2 | 23.2 | 23.2 | 25.6 | 25.6 | 25.6 | 25.6 |

All specifications are subject to change without prior notice. Although every effort has been made to ensure accuracy, Aermec does not assume responsibility or liability for eventual errors or omissions.

Aermec S.p.A.
Via Roma, 996
37040 Bevilacqua (VR) - Italy
Tel. + 39 0442 633111 - Fax +39 0442 93577